


B10 Pressure Relief Valve

The B10 valve offers a high flow rate and smooth external profile. It is ideal for applications such as lifting bags, oil booms and large inflatable structures. It is widely used on SOLAS life-rafts and Marine Evacuation Systems.

B10 Key attributes and benefits:

- Very high flow rate (*over twice the flow rate of A6 valve*).
- Approved to ISO 15738 for SOLAS life-rafts.
- Low and smooth internal profile to protect fabric when deflated.
- Rugged design, to ensure long life.
- Operating temperature: -30°C to $+65^{\circ}\text{C}$.

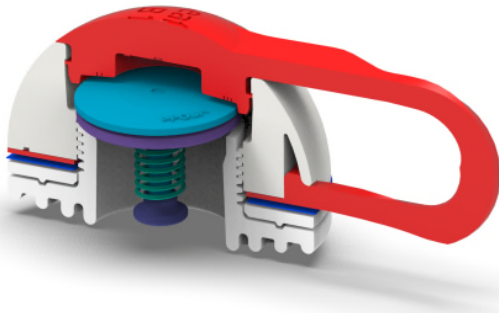

- Rapid installation with clamp fitting – no welding or adhesive required.
- Wide range of pressure settings available from 0.5psi to 5.0psi.
- Plug option available; can be supplied with plug attached or loose.



Contact Details:

Leaffield Marine Ltd.,
9 Atworth Business Park,
Atworth, Wiltshire, UK, SN12 8SB

Tel: +44 (0)1225 899550
Email: sales@leaffieldmarine.co.uk
Website: www.leaffieldmarine.co.uk

ISO 9001 Company

Leaffield
Marine

M-08-CI-B10-01 Rev 02